


# LED WALL WASH LIGHT SERIES




# XQ18W30B-24

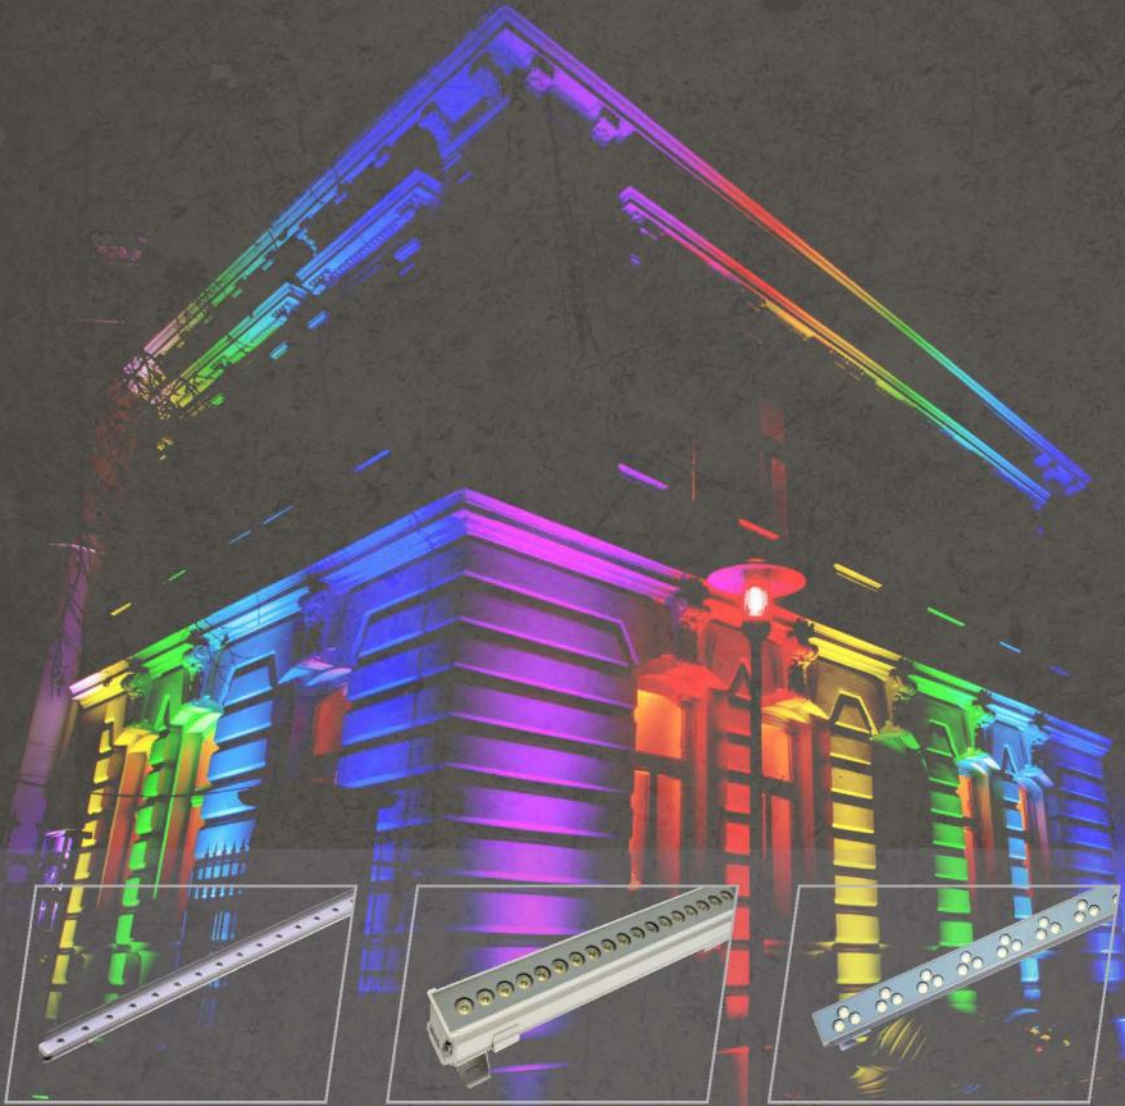


Usage Environment	-25~45°C
Storage condition	25±5°C
Voltage Rate	DC24V
Frequency	50/60HZ
Powe	18W±5%
Power Efficiency	93%
Power Factor	0.95PF
LED Lighting Effect	80-90LM/W
Luminous Flux	1450-1650LM
CCT	2800-3200K 4000-4500K 6000-6500K
CRI	>70RA
LED specifications	3030Lamp beads
LED Quantity	18


## Dimension

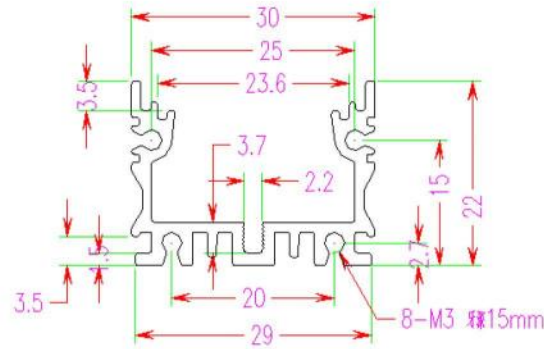

# 18W LED WALL WASH LIGHT

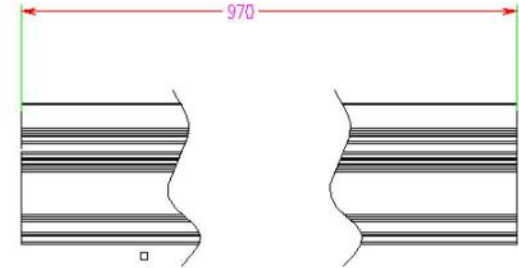

## Photometrics

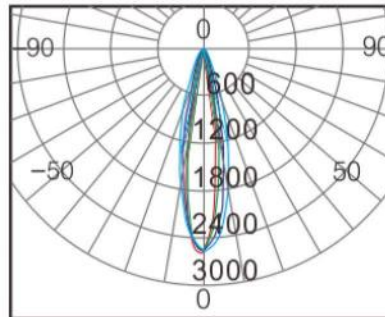

PRODUCT INFORMATION

# XQ36WW55B-24





Usage Environment	-25~45°C
Storage condition	25±5°C
Voltage Rate	DC24V
Frequency	50/60HZ
Power	36W±5%
Power Efficiency	93%
Power Factor	0.95PF
LED Lighting Effect	80-90LM/W
Luminous Flux	2600-2700LM
CCT	2000K-2500K
CRI	>70RA
LED specifications	1W High power lamp beads
LED Quantity	36

## 36W LED WALL WASH LIGHT

### Dimension



### Photometrics

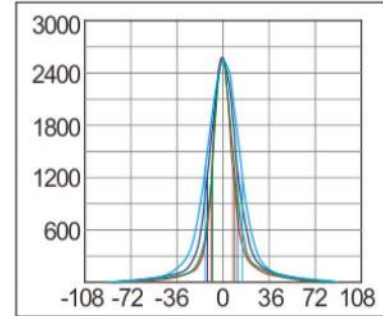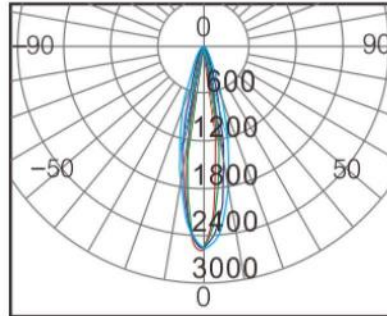

PRODUCT INFORMATION



# XQ54WWW60B-24





Usage Environment	-25~45°C
Storage condition	25±5°C
Voltage Rate	DC24V
Frequency	50/60HZ
Power	54W±5%
Power Efficiency	93%
Power Factor	0.95PF
LED Lighting Effect	80-90LM/W
Luminous Flux	4200-4300LM
CCT	2800-3200K 4000-4500K 6000-6500K
CRI	>70RA
LED specifications	1W High power lamp beads
LED Quantity	54

## 54W LED WALL WASH LIGHT

### Dimension



### Photometrics

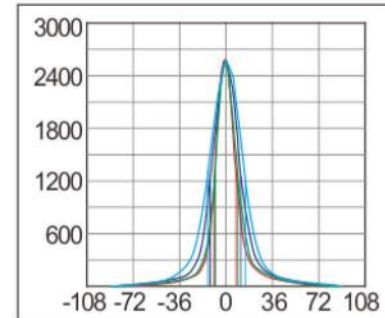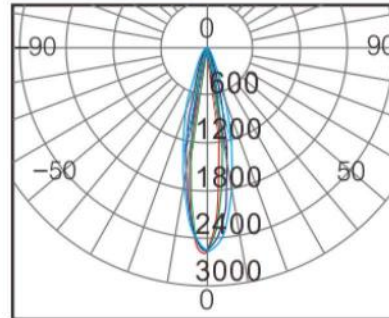

PRODUCT INFORMATION